



Specifications


- Low PIM
- Low VSWR
- Multiple configurations
- 50 Ohm impedance
- RoHS Compliant

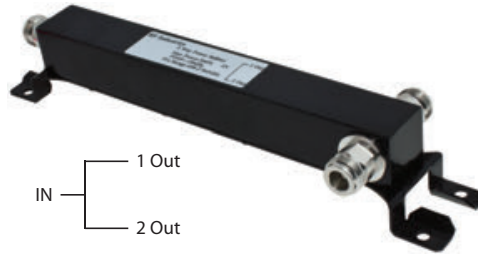

Description	2 Way Power Splitter, N Female
Part Number	RFPS-2-NF
Average Power	300 watts
Peak Power	1 Kw
VSWR	≤ 1.20
Frequency Range	698-2700 MHz
Insertion Loss	≤ 0.1 dB
Split Loss	3 dB
PIM3	≤ -155 dBc

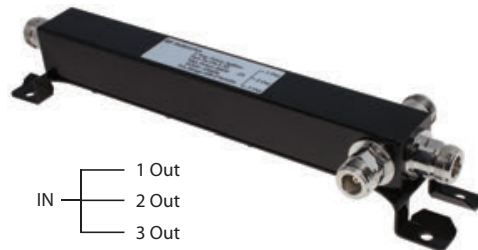

Description	3 Way Power Splitter, N Female
Part Number	RFPS-3-NF
Average Power	300 watts
Peak Power	1 Kw
VSWR	≤ 1.25
Frequency Range	698-2700 MHz
Insertion Loss	≤ 0.2 dB
Split Loss	4.8 dB
PIM3	≤ -155 dBc

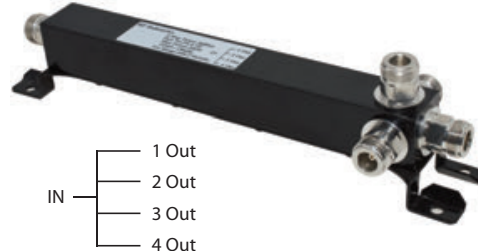

Description	4 Way Power Splitter, N Female
Part Number	RFPS-4-NF
Average Power	300 watts
Peak Power	1 Kw
VSWR	≤ 1.3
Frequency Range	698-2700 MHz
Insertion Loss	≤ 0.3 dB
Split Loss	6 dB
PIM3	≤ -155 dBc



Description	3dB Hybrid Coupler, N Female
Part Number	RFHC-3-NF
Frequency Range	698-2700 MHz
PIM3	≤ -155 dBc



Description	30w Termination Load, N Male
Part Number	RFLOAD-NM30
Average Power	30 watts
Frequency Range	0-3 GHz
PIM3	≤ -110 dBc



Description	50w Termination Load, N Male
Part Number	RFLOAD-NM50
Average Power	50 watts
Frequency Range	0-3 GHz
PIM3	≤ -110 dBc

Manufactured by



RF Connectors
Division of RF Industries

(800) 233-1728

(858) 549-6340

www.rfcoaxconnectors.com

rfi@rfindustries.com

(Please check website for latest products)