


Power Tapper N Type

Frequency 350-2700MHz

Features


- Low Insertion Loss
- Low VSWR
- Low PIM -155dBc
- 200 Watt Average Power
- Indoor/Outdoor Use
- RoHS Compliant
- Install Bracket Included

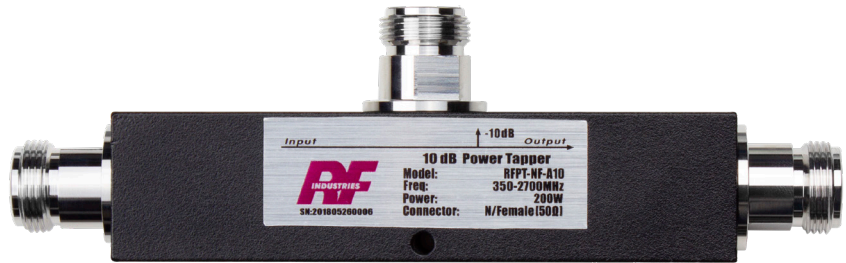

GENERAL SPECIFICATIONS

Frequency Range.....	350-2700MHz
Impedance.....	50Ω
Power Rating.....	200W avg
PIM, Passive IM.....	≤-155dBc@2x43dBm
IP Grade.....	IP65
Temperature Range.....	-35° C to +85° C
Connector Type.....	N Type Female
Housing Material.....	Aluminum
Color.....	Black

Electrical Specifications					
Model Number	Coupling	Branch Flatness ref. to Input Level, incl Loss, dB		Input VSWR max	
		340-960	1710-2700	340-960	1710-2700
RFPT-NF-A3	3.0dB	±1.2	±0.5	1.30:1	1.25:1
RFPT-NF-A48	4.8dB	±1.2	±0.5	1.30:1	1.25:1
RFPT-NF-A6	6.0dB	±1.2	±0.5	1.30:1	1.25:1
RFPT-NF-A7	7.0dB	±1.0	±0.5	1.30:1	1.25:1
RFPT-NF-A10	10.0dB	±1.0	±0.5	1.25:1	1.25:1
RFPT-NF-A20	20dB	±1.2	±0.6	1.25:1	1.25:1



MOUNTING BRACKET INCLUDED

